

Certificate of Analysis

Nexus Research Laboratories EOOD

Nexus Research Laboratories EOOD
Str. Vrabcha No. 17A, Floor 1, Apt. 3,
Oborishte District
1000 Sofia
Bulgaria
partnerships@peptralabs.com

Liquilabs s.r.o.

Inovační 122
252 41 Zlatníky-Hodkovice
Czechia
www.liquilabs.cz



[Verify Results Online](#)

Sample Identification

Sample Name MOTS-C
Batch Number XD-MS10-PO05
Date Published 2026-08-21 15:16

Results for LYO-0646

Peptides	Result	Unit	Uncertainty	Acceptable Range
MOTS-C Assay Peptide Screening 0.1% TFA	9.32	mg	[± 0.05]	
MOTS-C Purity Peptide Screening 0.1% TFA	97.5	%	[± 0.5]	
MOTS-C Identification by Spectrum (FTIR) Peptide Screening 0.1% TFA	948		[± 5]	
MOTS-C Identification by RT Peptide Screening 0.1% TFA	0.993		[± 0.005]	
Microbiology	Result	Unit	Uncertainty	Acceptable Range
Bacterial Endotoxin Chromgenic USP<85>/ Eur. Ph. 2.6.14. Bacterial Endotoxin Chromgenic Test	0.006	EU/mg	[± 0]	

	Method Specification		
Determination of identity, content and purity of MOTS-C			
<i>Document number</i> MOTS_008_2026	<i>Superseded document</i> -	<i>Number of pages</i> 4	

1. Content Assessment

1.1. Instrumentation

Module	Name	Serial Number
System Controller	Shimadzu CBM-40 Lite	L221226351398
Degassing Unit	Shimadzu DGU-403	NA
Pump	Shimadzu LC-40B XR	L22146350580
Autosampler	Shimadzu SIL-40C XR	L22216351622
Colum Thermostat	Shimadzu CTO-40S	L22236351602
PDA Detector	Shimadzu SPD-M40	L22276352808
SQ MS Detector	Shimadzu LCMS-2050	O12476200760

1.2. Chromatographic conditions

Chromatographic conditions	
Eluent A	0.1% DFA in Water (HPLC, Gradient Grade)
Eluent B	0.1% DFA in Acetonitrile (HPLC, Gradient Grade)
Flow rate	0.8 mL/min
Program	Gradient elution
Injection volume	2 µL
Colum Temperature	60°C
Column	Waters XSelect CSH C18, 100x2.1mm 2.5µm
Detection wavelength	280nm


Gradient Program		
Time [min]	A [%]	B [%]
1	98	2
13.99	35	65
14	5	95
15	5	95
15.01	98	2
19	end	

1.3. Sample preparation

Whole amount of container was dissolved in 2mL of water (LCMS Grade). 100 µL of sample was transferred to HPLC vial and diluted by 900 µL water (LCMS Grade) and submitted for analysis.

1.4. Calibration curve

Calibration curve detail	
Quantitative method	External Standard
Calibration Type	Linear
Number of calibration points	5
Force through Zero	Enabled
Weighting Method	None

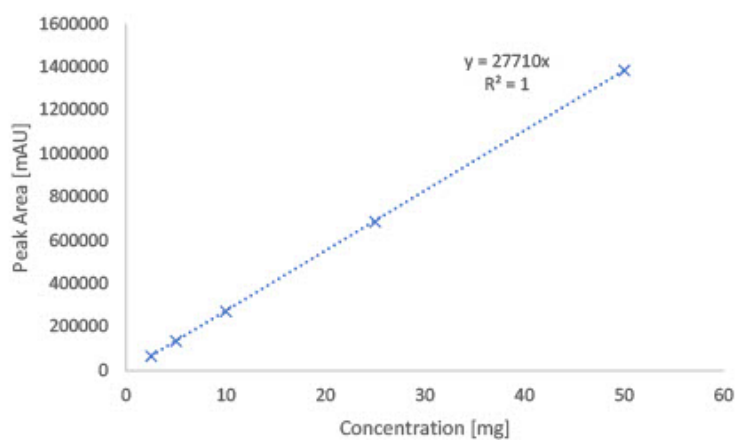

2. Purity assessment

2.1 Instrumentation

Module	Name	Serial Number
System Controller	Shimadzu CBM-40 Lite	L221226351398
Degassing Unit	Shimadzu DGU-403	NA
Pump	Shimadzu LC-40B XR	L22146350580
Autosampler	Shimadzu SIL-40C XR	L22216351622
Colum Thermostat	Shimadzu CTO-40S	L22236351602
PDA Detector	Shimadzu SPD-M40	L22276352808
SQ MS Detector	Shimadzu LCMS-2050	O12476200760

2.2 Chromatographic conditions

Chromatographic conditions	
Eluent A	0.1% DFA in Water (HPLC, Gradient Grade)
Eluent B	0.1% DFA in Acetonitrile (HPLC, Gradient Grade)
Flow rate	0.8 mL/min
Program	Gradient elution
Injection volume	2 µL
Colum Temperature	60°C
Column	Waters XSelect CSH C18, 100x2.1mm 2.5µm
Detection wavelength	225nm

Gradient Program		
Time [min]	A [%]	B [%]
1	98	2
13.99	35	65
14	5	95
15	5	95
15.01	98	2
19	end	

2.3 Purity assesment

Purity of compound assesed by area normalization method, comparing area of each peak to sum of area of all peaks detected at wavelenght of 225 nm.

Analysis Report




Analysis of quantity and purity of active ingredient by UHPLC with UV detection

Sample Information


Injection Volume : 2
Data File : LYO-0646_027.lcd
Method File : Peptide Screening_DFA_Group E.lcm
Date Acquired : 8/21/2026 12:56:24 AM

Chromatogram

uAU

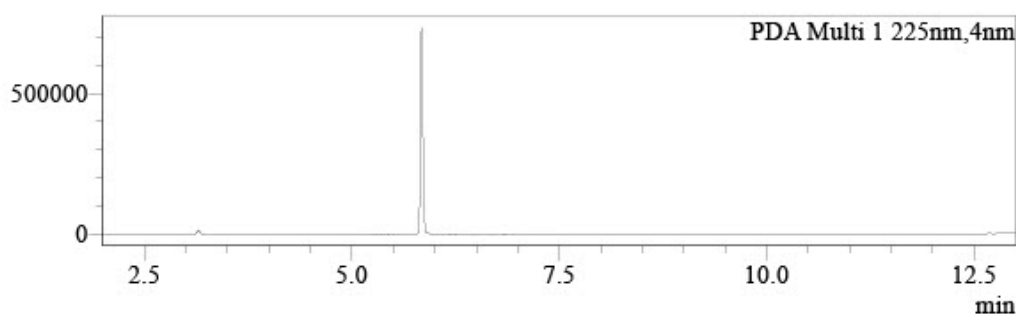

uAU

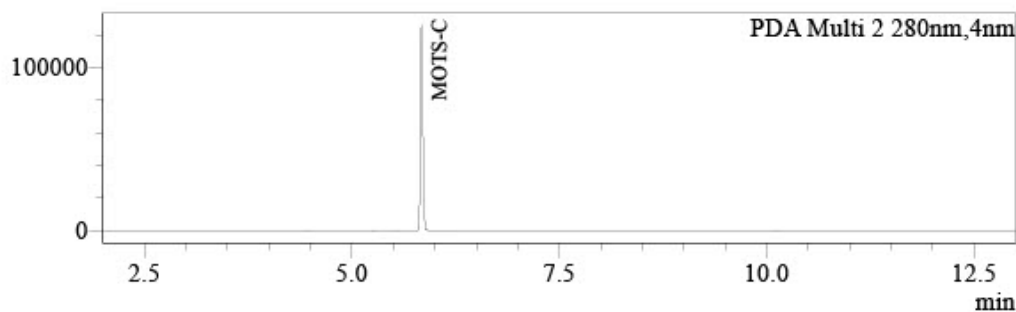

Peak Table

PDA Ch1 225nm

Name	Ret. Time	Area	Conc.	Unit	Area%
	3.149	34943	0.000		2.267
	5.249	1614	0.000		0.105
	5.529	2648	0.000		0.172
	5.838	1502388	0.000		97.457
		1541594			100.000

Peak Table

PDA Ch2 280nm

Name	Ret. Time	Area	Conc.	Unit
MOTS-C	5.838	257296	9.325	mg
	14.235	1271	0.000	
		258567		

Endotoxin Determination Report




File Information

Filename: C:\UVVis-Data\Data\File_260820_135540.vqud
Date/Time: 08/20/2026 03:18:46 PM

Instrument Information

Instrument Type: UV-1900 Series
Model (S/N): UV-1900i (A12536253123)

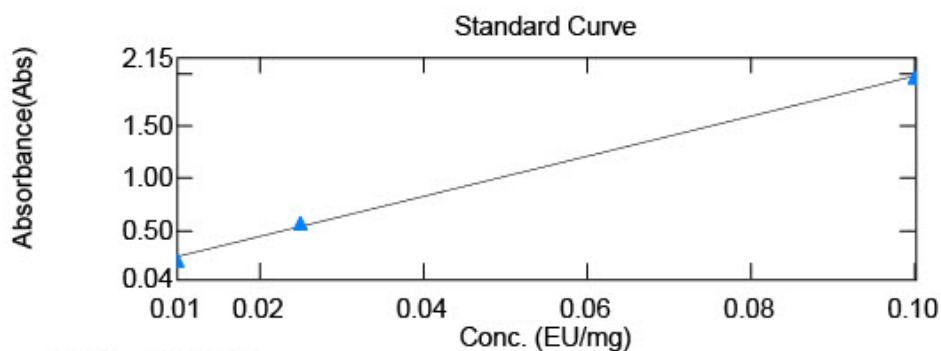

$$y = 19.2242x + 0.0569806$$
$$r^2 = 0.99866$$

	Sample Name	Conc	Raw_WL545.0	Dilution Rate
1	LIQ-0055	0.003	0.1086	1.00
2	LIQ-0056	0.734	1.4685	10.00
3	LYO-0620	5.092	1.0358	100.00
4	LYO-0621	0.032	0.0880	20.00
5	LYO-0622	0.906	0.9279	20.00
6	LYO-0623	0.057	0.1122	20.00
7	LYO0624	2.521	1.2687	40.00
8	LYO-0625	0.073	0.1270	20.00
9	LYO-0626	0.043	0.0981	20.00
10	LYO-0627	0.394	0.4356	20.00
11	LYO-0628	0.051	0.1056	20.00
12	LIQ-0057	0.056	0.1113	20.00
13	LYO-0629	2.182	1.1055	40.00
14	LYO-0630	0.053	0.1084	20.00
15	LYO-0631	1.632	0.8411	40.00
16	LYO-0645	1.560	0.8067	40.00
17	LYO-0646	0.058	0.1130	20.00
18	LYO-0647	0.155	0.2056	20.00
19	LYO0648	2.452	1.2354	40.00
20	LYO-0649	1.360	0.7105	40.00

	Sample Name	Conc	Raw_WL545.0	Dilution Rate
21	LYO-0650	0.043	0.0986	20.00
22	LYO-0651	2.908	1.4546	40.00
23	LYO-0652	0.129	0.1805	20.00
24	LYO-0653	0.156	0.0870	100.00

Responsibles



Mr. Ján Galbavý
CEO

Analysis results relate only to the samples tested.

This document shall not be reproduced except in full, without the written approval of Liquilabs s.r.o.